



THE **X** CONCEPT FOR OUR FILTERS

Protect the performance of your system with MYclean.  
Quality and efficiency are fundamental for MP Filtri:  
this exclusive new filter element possesses polygon shape geometry and specific seal  
that ensures only original spare parts can be used - ensuring correct operation and  
higher system reliability.

MPTX series

with **MYCLEAN** MFX Filter Element



- **Protects the machine from improper use of non-original products.**
- **Safety of constant quality protection & reliability**

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.



The products identified as MPTX are protected by:

- Italian Patent n° 102014902261205
- Canadian Patent n° 2,937,258
- European Patent n° 3 124 092 B1
- US Patent n° 20170030384 A1

TOGETHER WITH **MYCLEAN**, AS OPTION, MPTX SERIES CAN BE PROVIDED WITH

**zerospark**<sup>®</sup>  
THE ANTI-STATIC FILTERS

THE **Z** CONCEPT FOR OUR FILTERS



Zerospark<sup>®</sup> is a specialist solution designed to solve the problem of electrostatic discharge inside hydraulic filters. Caused by the electrical charge build-up due to the passage of oil through the filters, this can result in damage to filter elements, oils and circuit components. It can even cause fire hazards in environments where flammable materials are present.

# MPTX series

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 300 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 800 kPa (8 bar)**  
**Flow rate up to 300 l/min**

MPTX is a range of return filters with integrated breather filter, for protection of the reservoir against the system contamination. They are directly fixed to the reservoir, in immersed or semi-immersed position. The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

#### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 300 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 3 or 6 fixing holes for installation, to suit a variety of reservoir surfaces
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Screw-in cover with a special shape, to allow the filter element replacement without the use of specific tools
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Integrated breather filter, to clean the air that moves into the reservoir as result of the oil level fluctuation
- Integrated breather filter with pressurization valve, to clean the air that moves into the reservoir as result of the oil level fluctuation and to guarantee the pressurization into the reservoir
- Visual, electrical and electronic clogging indicators
- MYclean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

#### Common applications:

- Light industrial equipment
- Mobile application

### Filter housing materials

- Head: Aluminium
- Cover: Polyamide
- Bowl: Polyamide

### Bypass valve

- Opening pressure 175 kPa (1.75 bar) ±10%
- Opening pressure 300 kPa (3 bar) ±10%

### Δp element type

- Microfiber filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPTX filters are provided for vertical mounting

## Weights [kg] and volumes [dm<sup>3</sup>]

Filter series	Weights [kg]					Volumes [dm <sup>3</sup> ]				
	Length	1	2	3	4	Length	1	2	3	4
<b>MPTX 025</b>		0.41	0.45	0.50	-		0.24	0.35	0.42	-
<b>MPTX 027</b>		0.44	0.48	0.55	-		0.24	0.35	0.42	-
<b>MPTX 110</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74
<b>MPTX 114</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74
<b>MPTX 116</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74
<b>MPTX 120</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74

Filter series	Length	Filter element design - H series					Filter element design - N series		
		A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
<b>MPTX 025-027</b>	<b>1</b>	7	10	23	28	42	59	51	54
	<b>2</b>	17	20	45	48	56	72	64	67
	<b>3</b>	21	24	50	55	59	76	74	75
<b>MPTX 110-120 114-116</b>	<b>1</b>	18	20	53	56	65	153	87	96
	<b>2</b>	28	38	65	75	95	158	111	123
	<b>3</b>	48	55	125	135	169	289	224	251
	<b>4</b>	79	89	180	185	198	306	264	289

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.




The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols




Filter series	Style 1 connection	Style 2 connections	Style 3 connections
<b>MPTX 025</b>	•	-	-
<b>MPTX 027</b>	•	-	-
<b>MPTX 110</b>	-	•	-
<b>MPTX 114</b>	•	-	-
<b>MPTX 116</b>	•	-	-
<b>MPTX 120</b>	-	-	•





# MPTX GENERAL INFORMATION

## Pressure drop



### Filter housings $\Delta p$ pressure drop

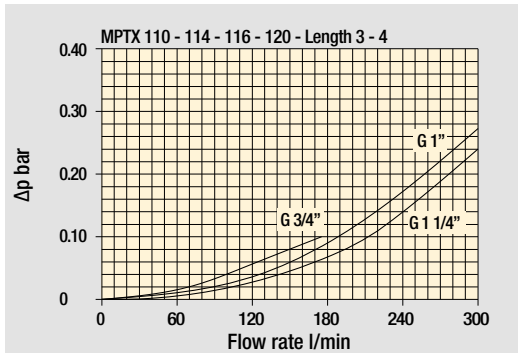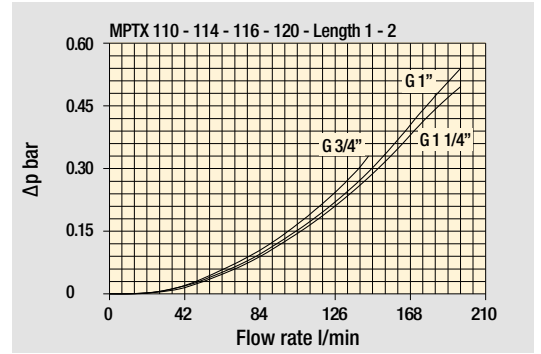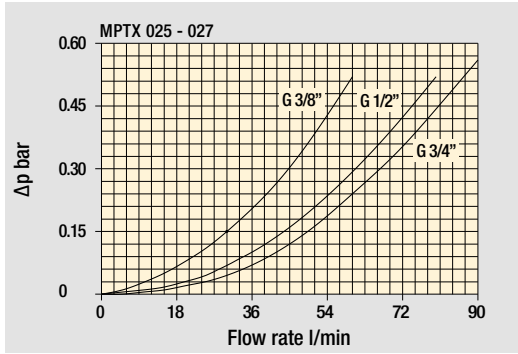

### Bypass valve pressure drop

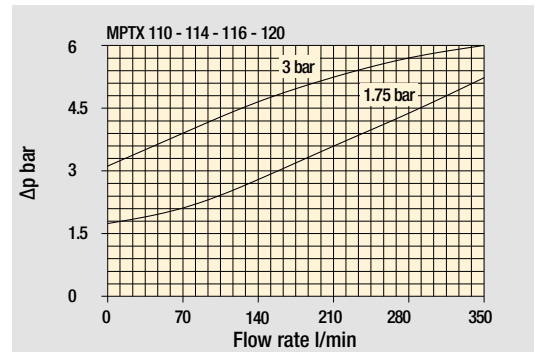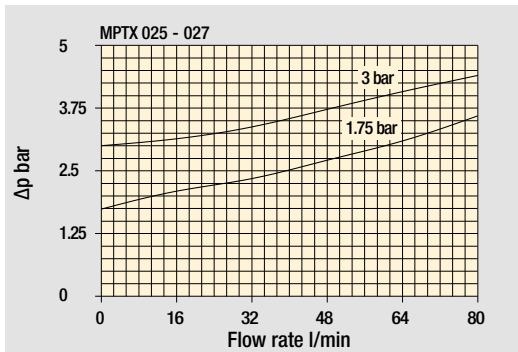

### Air breather pressure drop

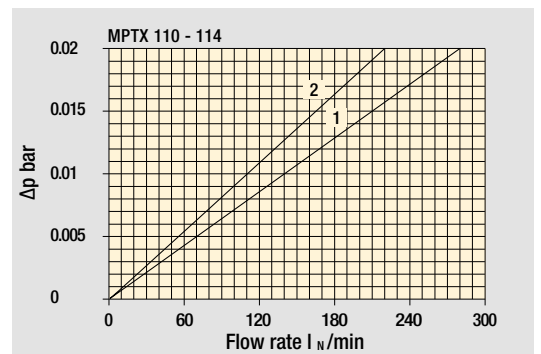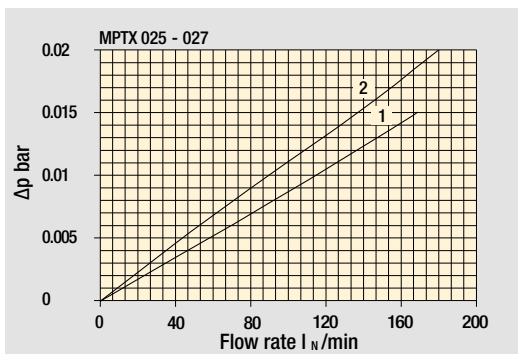





- 1  C With air breather 10  $\mu m$
- 2  D With anti-splash and SAP50 10  $\mu m$

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

MPTX 025 -027		
Air breather port plugged Indicator port	Air breather standard Indicator port	Anti-splash air breather & pressurized Double indicator port
		

## Multiport - Multifunction

MPTX 110	
Standard - Single IN Port	Double IN Port - Double indicator port
	
Double IN Port Option: double drain port	Double IN Port - Indicator port Option: drain port
	

## MPTX 120

Triple IN port  
Option: double drain port



# MPTX MPTX025 - MPTX027

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>MPTX025</b>	<b>1</b>	<b>S</b>	<b>A</b>	<b>G3</b>	<b>A10</b>	<b>E</b>	<b>P01</b>	
<b>MPTX025   MPTX027</b> Filter featuring <b>MYCLEAN</b> Filter Element	Configuration example 2: <b>MPTX027</b>	<b>3</b>	<b>C</b>	<b>W</b>	<b>G6</b>	<b>A03</b>	<b>B</b>	<b>P01</b>	
<b>Length</b>									
<b>1</b>   <b>2</b>   <b>3</b>									
<b>Air breather</b>									
<b>S</b> Without air breather									
<b>C</b> With air breather 10 µm									
<b>D</b> With anti-splash and air breather SAP050 10 µm									
<b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar									
<b>Seals and treatments</b>	Filtration rating								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>A</b> NBR	•	•	•						
<b>V</b> FPM	•	•	•						
<b>W</b> NBR head anodized	•	•	-						
<b>Z</b> FPM head anodized	•	•	-						
<b>Connections</b>									
<b>G1</b> G 3/8"	<b>G6</b> 3/4" NPT								
<b>G2</b> G 1/2"	<b>G7</b> SAE 6 - 9/16" - 18 UNF								
<b>G3</b> G 3/4"	<b>G8</b> SAE 8 - 3/4" - 16 UNF								
<b>G4</b> 3/8" NPT	<b>G9</b> SAE 12 - 1 1/16" - 12 UN								
<b>G5</b> 1/2" NPT									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm								
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm								
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm								
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm								
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm								
			<b>Bypass valve</b>			<b>Executions</b>			
			<b>E</b> 3 bar	<b>P01</b>	<b>zereospark<sup>+</sup></b>	<b>Z01</b>	MP Filtri standard		
			<b>B</b> 1.75 bar	<b>Pxx</b>	<b>Zxx</b>	Customized			

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 2: <b>MFx020</b>	<b>1</b>	<b>A10</b>	<b>H</b>	<b>B</b>	<b>E</b>	<b>P01</b>	
<b>MFx020</b> Filter Element with <b>MYCLEAN</b> feature	Configuration example 1: <b>MFx020</b>	<b>3</b>	<b>A03</b>	<b>N</b>	<b>B</b>		<b>P01</b>	
<b>Element length</b>								
<b>1</b>   <b>2</b>   <b>3</b>								
<b>Filtration rating (filter media)</b>								
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm							
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm							
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm							
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm							
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm							
<b>Element Δp</b>	Filter media							
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>					
<b>N</b> 10 bar	-	•	•					
<b>H</b> 10 bar	•	-	-					
			<b>Seals</b>		<b>Bypass valve</b>		<b>Executions</b>	
	<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b>	<b>zereospark<sup>+</sup></b>	<b>Z01</b>	MP Filtri standard		
	<b>V</b> FPM	- 1.75 bar	<b>Pxx</b>	<b>Zxx</b>	Customized			

### CLOGGING INDICATORS



See page 710-711

<b>BVA</b> Axial pressure gauge	<b>BEA</b> Electrical pressure indicator
<b>BVR</b> Radial pressure gauge	<b>BEM</b> Electrical pressure indicator
<b>BVP</b> Visual pressure indicator with automatic reset	<b>BLA</b> Electrical / visual pressure indicator
<b>BVQ</b> Visual pressure indicator with manual reset	

### ADDITIONAL FEATURES

See page 266

<b>TE</b> Extension tube
<b>DPT</b> Dipstick

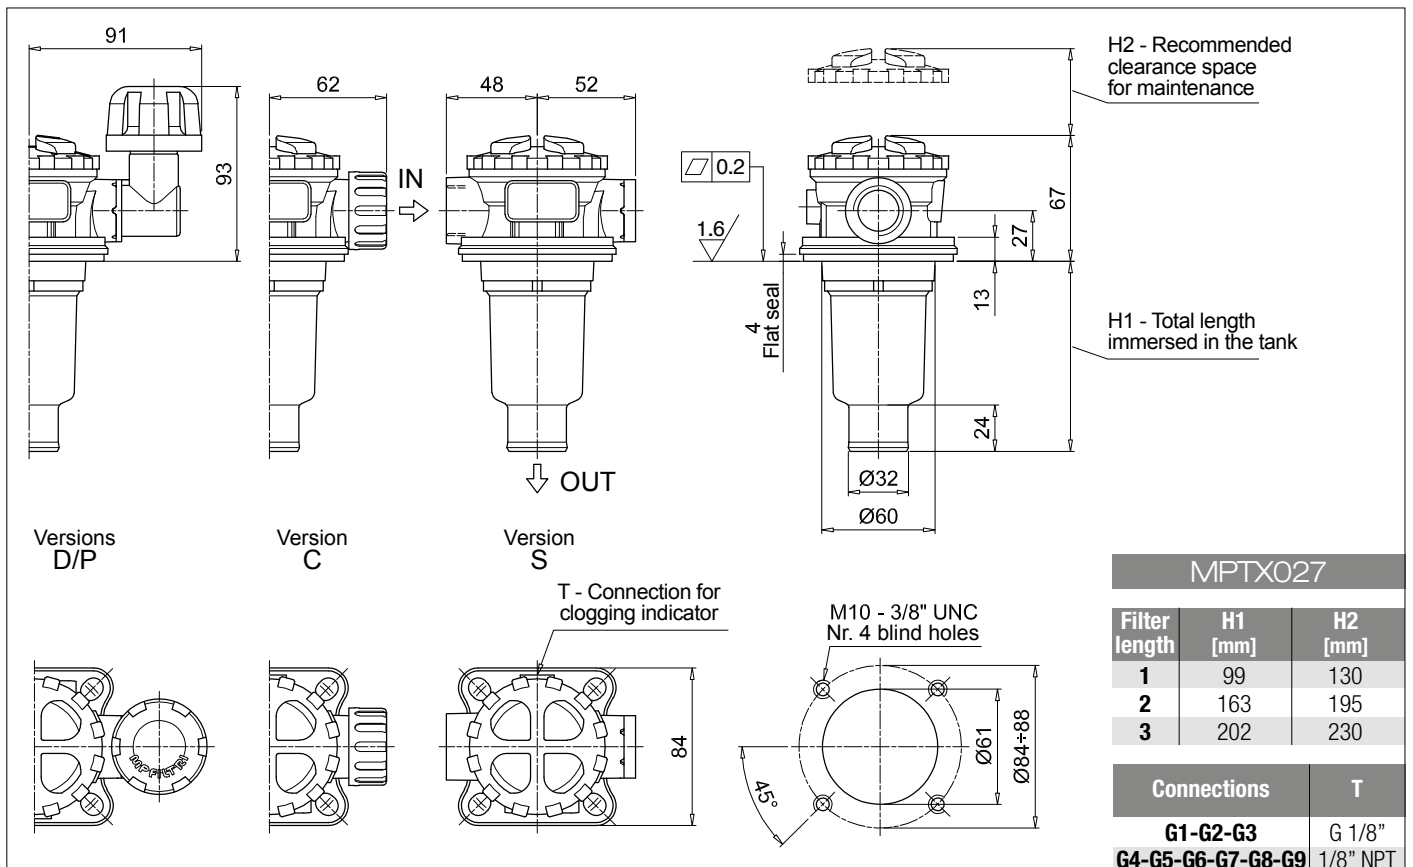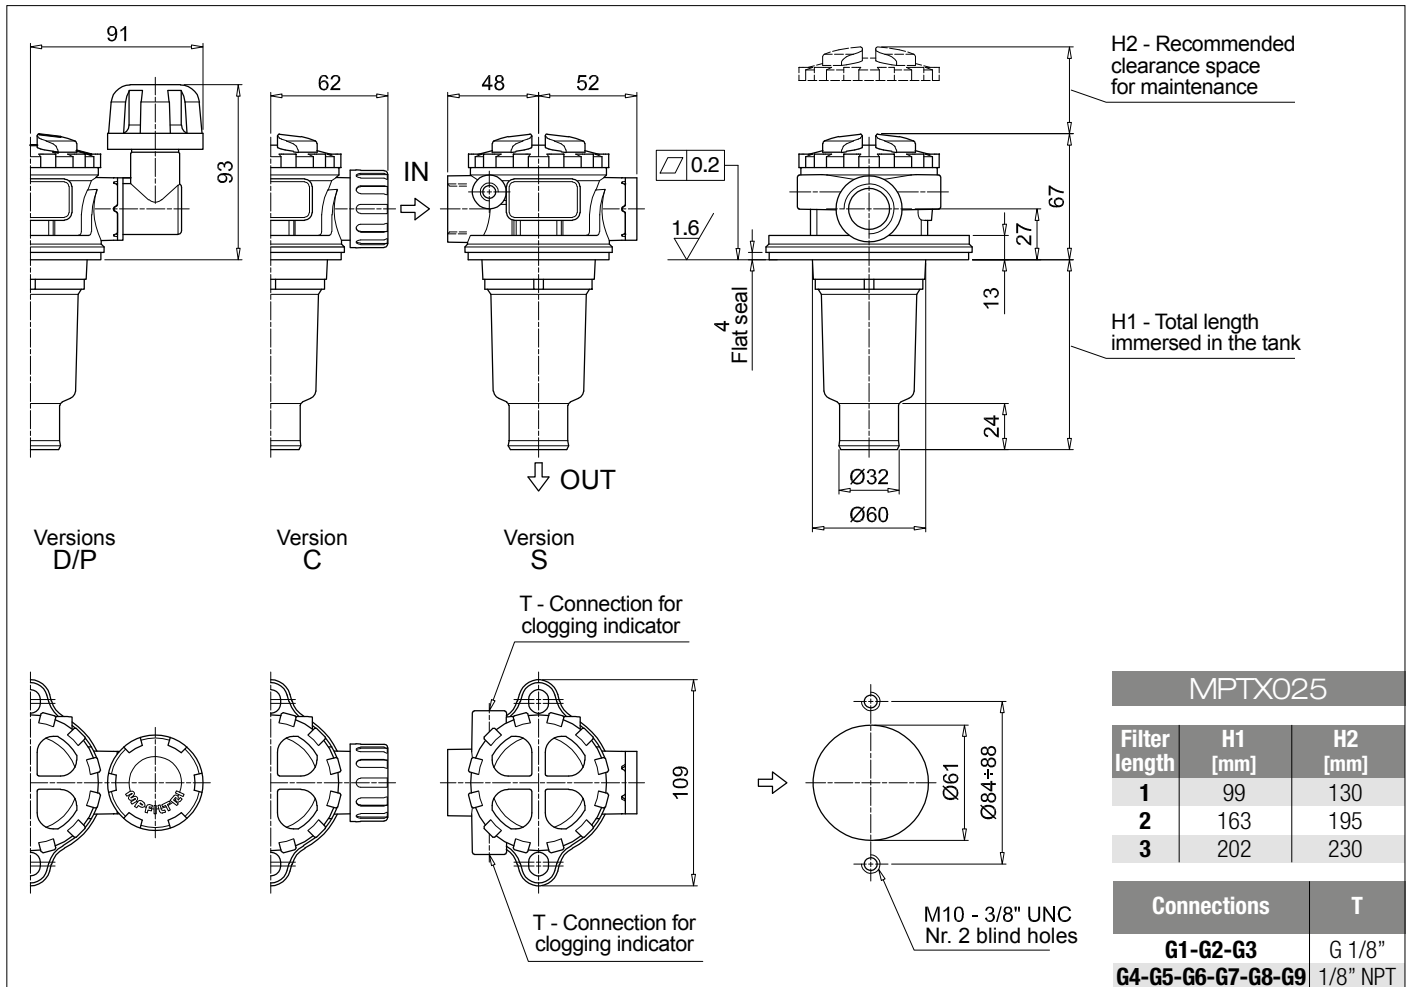



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>			Configuration example 1: <b>MPTX110</b>   1   S   A   G1   0   A06   E   P01								
<b>MPTX110</b> Filter featuring <b>MYCLEAN</b> Filter Element			Configuration example 2: <b>MPTX110</b>   3   P   V   G4   1   M25   B   P01								
<b>Length</b>											
1   2   3   4											
<b>Air breather</b>											
S Without air breather											
C With air breather 10 µm											
D With anti-splash and air breather SAP050 10 µm											
P With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar											
<b>Seals and treatments</b>			Filtration rating								
			Axx	Mxx	Pxx						
A NBR			•	•	•						
V FPM			•	•	•						
W NBR head anodized			•	•	-						
Z FPM head anodized			•	•	-						
<b>Main Connections</b>		<b>Aux size 1</b>	<b>Aux size 2</b>	<b>Main Connections</b>		<b>Aux size 1</b>	<b>Aux size 2</b>				
G1 G 3/4"		G 3/8"	G 1/2"	G6 1 1/4" NPT		3/8" NPT	1/2" NPT				
G2 G 1"				G7 SAE 12 - 1 1/16" - 12 UN		SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF				
G3 G 1 1/4"		3/8" NPT	1/2" NPT	G8 SAE 16 - 1 5/16" - 12 UN							
G4 3/4" NPT				G9 SAE 20 - 1 5/8" - 12 UN							
G5 1" NPT											
<b>Aux connection</b> - see previous table											
0 Not machined   1 Aux size 1   2 Aux size 2											
<b>Filtration rating (filter media)</b>											
A03 Inorganic microfiber 3 µm			M25 Wire mesh 25 µm								
A06 Inorganic microfiber 6 µm			M60 Wire mesh 60 µm								
A10 Inorganic microfiber 10 µm			M90 Wire mesh 90 µm								
A16 Inorganic microfiber 16 µm			P10 Resin impregnated paper 10 µm								
A25 Inorganic microfiber 25 µm			P25 Resin impregnated paper 25 µm								
			<b>Executions</b>								
			<b>Bypass valve</b>								
			E 3 bar								
			B 1.75 bar								
			<b>Base</b>								
			P01 <b>zerospark*</b>								
			Pxx								
			Z01								
			Zxx								
					MP Filtri standard						
					Customized						

### FILTER ELEMENT

<b>Element series and size</b>			Configuration example 1: <b>MFX100</b>   1   A06   H   B   E   P01								
<b>MFX100</b> Filter Element with <b>MYCLEAN</b> feature			Configuration example 2: <b>MFX100</b>   3   M25   N   V   P01								
<b>Element length</b>											
1   2   3   4											
<b>Filtration rating (filter media)</b>											
A03 Inorganic microfiber 3 µm			M25 Wire mesh 25 µm								
A06 Inorganic microfiber 6 µm			M60 Wire mesh 60 µm								
A10 Inorganic microfiber 10 µm			M90 Wire mesh 90 µm								
A16 Inorganic microfiber 16 µm			P10 Resin impregnated paper 10 µm								
A25 Inorganic microfiber 25 µm			P25 Resin impregnated paper 25 µm								
<b>Element Δp</b>			Filter media								
			Axx	Mxx	Pxx						
N 10 bar			-	•	•						
H 10 bar			•	-	-						
			<b>Seals</b>								
			B NBR								
			V FPM								
			<b>Bypass valve</b>								
			E 3 bar								
			- 1.75 bar								
			<b>Executions</b>								
			<b>Base</b>								
			P01 <b>zerospark*</b>								
			Pxx								
			Z01								
			Zxx								
					MP Filtri standard						
					Customized						

### CLOGGING INDICATORS

See page 710-711

<b>BVA</b> Axial pressure gauge	<b>BEA</b> Electrical pressure indicator
<b>BVR</b> Radial pressure gauge	<b>BEM</b> Electrical pressure indicator
<b>BVP</b> Visual pressure indicator with automatic reset	<b>BLA</b> Electrical / visual pressure indicator
<b>BVQ</b> Visual pressure indicator with manual reset	

### ADDITIONAL FEATURES


See page 266

<b>TE</b> Extension tube	<b>DPT</b> Dipstick
<b>DFS</b> Diffuser with fast lock connection	


MPTX110		
Filter length	H1 [mm]	H2 [mm]
1	99	120
2	144	170
3	222	250
4	324	350


Connections	T
G1-G2-G3	G 1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

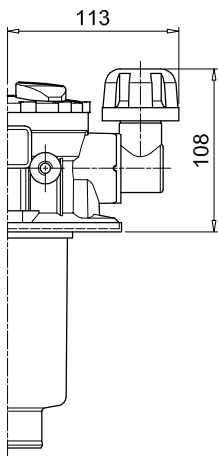






Versions D/P

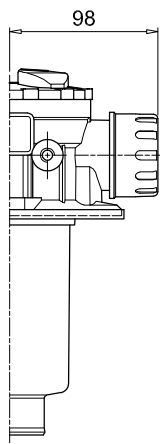

Version C

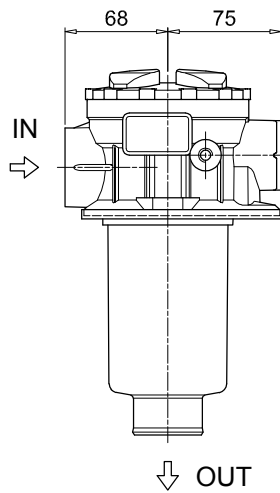

Version S

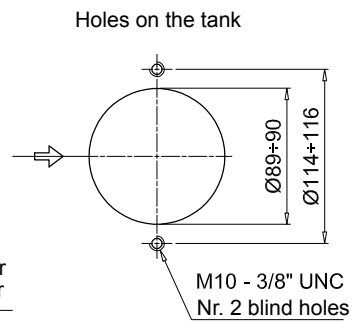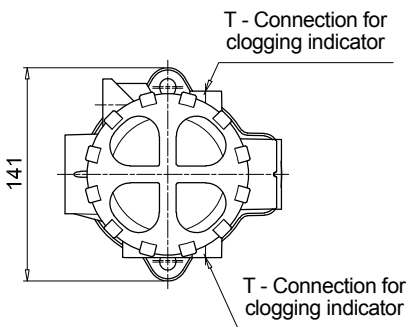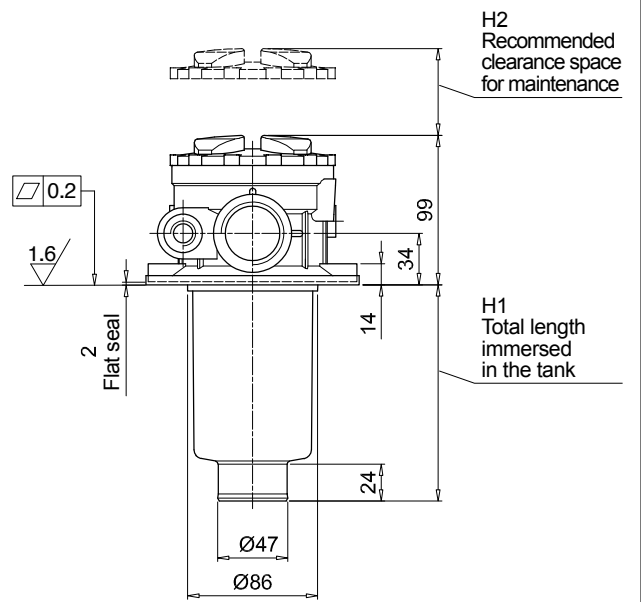

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>MPTX114</b>	<b>4</b>	<b>S</b>	<b>A</b>	<b>G3</b>	<b>A10</b>	<b>E</b>	<b>P01</b>	
<b>MPTX114</b> Filter featuring <b>MYCLEAN</b> Filter Element	Configuration example 2: <b>MPTX114</b>	<b>3</b>	<b>C</b>	<b>W</b>	<b>G6</b>	<b>A03</b>	<b>B</b>	<b>P01</b>	
<b>Length</b>									
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>									
<b>Air breather</b>									
<b>S</b> Without air breather									
<b>C</b> With air breather 10 µm									
<b>D</b> With anti-splash and air breather SAP050 10 µm									
<b>P</b> With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar									
<b>Seals and treatments</b>	Filtration rating								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>A</b> NBR	•	•	•						
<b>V</b> FPM	•	•	•						
<b>W</b> NBR head anodized	•	•	-						
<b>Z</b> FPM head anodized	•	•	-						
<b>Connections</b>									
<b>G1</b> G 3/4"	<b>G6</b> 1 1/4" NPT								
<b>G2</b> G 1"	<b>G7</b> SAE 12 - 1 1/16" - 12 UN								
<b>G3</b> G 1 1/4"	<b>G8</b> SAE 16 - 1 5/16" - 12 UN								
<b>G4</b> 3/4" NPT	<b>G9</b> SAE 20 - 1 5/8" - 12 UN								
<b>G5</b> 1" NPT									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm								
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm								
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm								
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm								
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm								
<b>Bypass valve</b>									
<b>E</b> 3 bar									
<b>B</b> 1.75 bar									
<b>Executions</b>									
<b>Base</b>	<b>zerospark</b>								
<b>P01</b>	<b>Z01</b>							MP Filtri standard	
<b>Pxx</b>	<b>Zxx</b>							Customized	

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 2: <b>MFX100</b>	<b>4</b>	<b>A10</b>	<b>H</b>	<b>B</b>	<b>E</b>	<b>P01</b>
<b>MFX100</b> Filter Element with <b>MYCLEAN</b> feature	Configuration example 1: <b>MFX100</b>	<b>3</b>	<b>A03</b>	<b>N</b>	<b>B</b>		<b>P01</b>
<b>Element length</b>							
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>							
<b>Filtration rating (filter media)</b>							
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm						
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm						
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm						
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm						
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm						
<b>Element Δp</b>	Filter media						
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>				
<b>N</b> 10 bar	-	•	•				
<b>H</b> 10 bar	•	-	-				
<b>Seals</b>							
<b>B</b> NBR							
<b>V</b> FPM							
<b>Bypass valve</b>							
<b>E</b> 3 bar							
<b>-</b> 1.75 bar							
<b>Executions</b>							
<b>Base</b>	<b>zerospark</b>						
<b>P01</b>	<b>Z01</b>						MP Filtri standard
<b>Pxx</b>	<b>Zxx</b>						Customized

### CLOGGING INDICATORS

See page 710-711

<b>BVA</b> Axial pressure gauge	<b>BEA</b> Electrical pressure indicator
<b>BVR</b> Radial pressure gauge	<b>BEM</b> Electrical pressure indicator
<b>BVP</b> Visual pressure indicator with automatic reset	<b>BLA</b> Electrical / visual pressure indicator
<b>BVQ</b> Visual pressure indicator with manual reset	

### ADDITIONAL FEATURES


See page 266

<b>TE</b> Extension tube	<b>DPT</b> Dipstick
<b>DFS</b> Diffuser with fast lock connection	


MPTX114		
Filter length	H1 [mm]	H2 [mm]
1	99	120
2	144	170
3	222	250
4	324	350


Connections	T
G1-G2-G3	G 1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

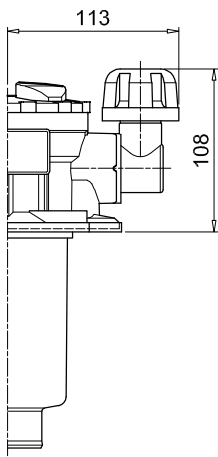






Versions D/P

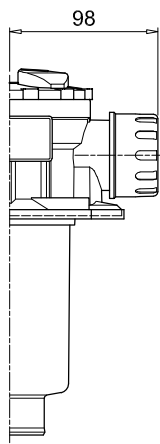

Version C

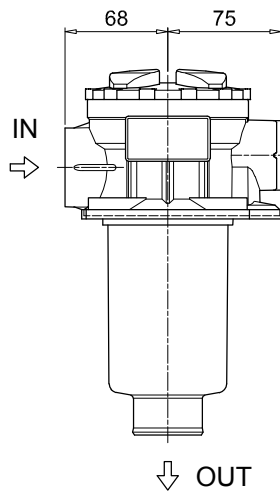

Version S

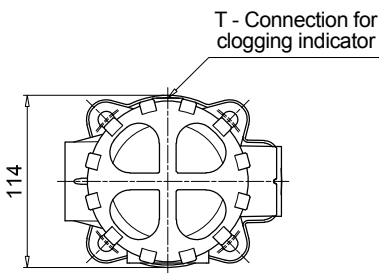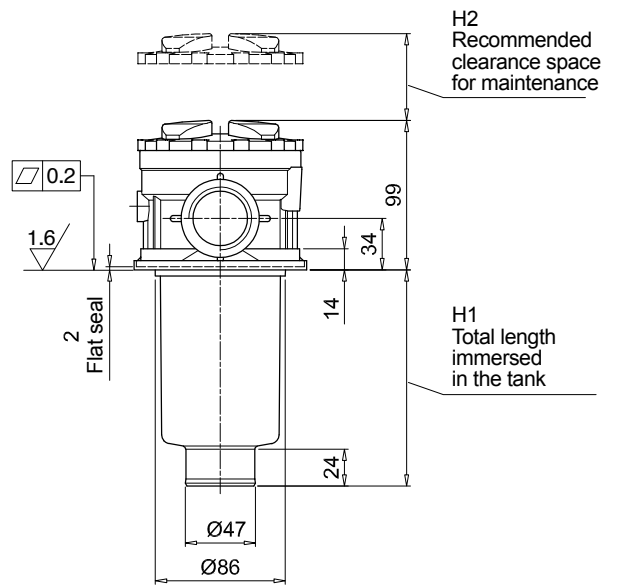

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>MPTX116</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>M90</b>   <b>E</b>   <b>P01</b>																				
<b>MPTX116</b> Filter featuring <b>MY CLEAN</b> Filter Element	Configuration example 2: <b>MPTX116</b>   <b>2</b>   <b>S</b>   <b>Z</b>   <b>G9</b>   <b>A03</b>   <b>B</b>   <b>P01</b>																				
<b>Length</b>	<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>																				
<b>Air breather</b>	<b>S</b> Without air breather																				
<b>Seals and treatments</b>	<table border="1"> <thead> <tr> <th></th> <th>Axx</th> <th>Mxx</th> <th>Pxx</th> </tr> </thead> <tbody> <tr> <td><b>A</b> NBR</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td><b>V</b> FPM</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td><b>W</b> NBR head anodized</td> <td>•</td> <td>•</td> <td>-</td> </tr> <tr> <td><b>Z</b> FPM head anodized</td> <td>•</td> <td>•</td> <td>-</td> </tr> </tbody> </table> <p>Flat seal on the head on request</p>		Axx	Mxx	Pxx	<b>A</b> NBR	•	•	•	<b>V</b> FPM	•	•	•	<b>W</b> NBR head anodized	•	•	-	<b>Z</b> FPM head anodized	•	•	-
	Axx	Mxx	Pxx																		
<b>A</b> NBR	•	•	•																		
<b>V</b> FPM	•	•	•																		
<b>W</b> NBR head anodized	•	•	-																		
<b>Z</b> FPM head anodized	•	•	-																		
<b>Connections</b>	<table border="1"> <tr> <td><b>G1</b> G 3/4"</td> <td><b>G6</b> 1 1/4" NPT</td> </tr> <tr> <td><b>G2</b> G 1"</td> <td><b>G7</b> SAE 12 - 1 1/16" - 12 UN</td> </tr> <tr> <td><b>G3</b> G 1 1/4"</td> <td><b>G8</b> SAE 16 - 1 5/16" - 12 UN</td> </tr> <tr> <td><b>G4</b> 3/4" NPT</td> <td><b>G9</b> SAE 20 - 1 5/8" - 12 UN</td> </tr> <tr> <td><b>G5</b> 1" NPT</td> <td></td> </tr> </table>	<b>G1</b> G 3/4"	<b>G6</b> 1 1/4" NPT	<b>G2</b> G 1"	<b>G7</b> SAE 12 - 1 1/16" - 12 UN	<b>G3</b> G 1 1/4"	<b>G8</b> SAE 16 - 1 5/16" - 12 UN	<b>G4</b> 3/4" NPT	<b>G9</b> SAE 20 - 1 5/8" - 12 UN	<b>G5</b> 1" NPT											
<b>G1</b> G 3/4"	<b>G6</b> 1 1/4" NPT																				
<b>G2</b> G 1"	<b>G7</b> SAE 12 - 1 1/16" - 12 UN																				
<b>G3</b> G 1 1/4"	<b>G8</b> SAE 16 - 1 5/16" - 12 UN																				
<b>G4</b> 3/4" NPT	<b>G9</b> SAE 20 - 1 5/8" - 12 UN																				
<b>G5</b> 1" NPT																					
<b>Filtration rating (filter media)</b>	<table border="1"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>M60</b> Wire mesh 60 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M90</b> Wire mesh 90 µm</td> </tr> <tr> <td><b>A16</b> Inorganic microfiber 16 µm</td> <td><b>P10</b> Resin impregnated paper 10 µm</td> </tr> <tr> <td><b>A25</b> Inorganic microfiber 25 µm</td> <td><b>P25</b> Resin impregnated paper 25 µm</td> </tr> </table>	<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm	<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm	<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm	<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm	<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm										
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm																				
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm																				
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm																				
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm																				
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm																				
<b>Bypass valve</b>	<table border="1"> <tr> <td><b>E</b> 3 bar</td> <td><b>B</b> 1.75 bar</td> </tr> </table>	<b>E</b> 3 bar	<b>B</b> 1.75 bar																		
<b>E</b> 3 bar	<b>B</b> 1.75 bar																				
<b>Executions</b>	<table border="1"> <tr> <td><b>Base</b></td> <td><b>zérospark*</b></td> <td></td> </tr> <tr> <td><b>P01</b></td> <td><b>Z01</b></td> <td>MP Filtri standard</td> </tr> <tr> <td><b>Pxx</b></td> <td><b>Zxx</b></td> <td>Customized</td> </tr> </table>	<b>Base</b>	<b>zérospark*</b>		<b>P01</b>	<b>Z01</b>	MP Filtri standard	<b>Pxx</b>	<b>Zxx</b>	Customized											
<b>Base</b>	<b>zérospark*</b>																				
<b>P01</b>	<b>Z01</b>	MP Filtri standard																			
<b>Pxx</b>	<b>Zxx</b>	Customized																			

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 2: <b>MFx100</b>   <b>1</b>   <b>M90</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b>												
<b>MFx100</b> Filter Element with <b>MY CLEAN</b> feature	Configuration example 1: <b>MFx100</b>   <b>2</b>   <b>A03</b>   <b>H</b>   <b>V</b>   <b>P01</b>												
<b>Element length</b>	<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>												
<b>Filtration rating (filter media)</b>	<table border="1"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>M60</b> Wire mesh 60 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M90</b> Wire mesh 90 µm</td> </tr> <tr> <td><b>A16</b> Inorganic microfiber 16 µm</td> <td><b>P10</b> Resin impregnated paper 10 µm</td> </tr> <tr> <td><b>A25</b> Inorganic microfiber 25 µm</td> <td><b>P25</b> Resin impregnated paper 25 µm</td> </tr> </table>	<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm	<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm	<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm	<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm	<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm		
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm												
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm												
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm												
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm												
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm												
<b>Element Δp</b>	<table border="1"> <thead> <tr> <th></th> <th>Axx</th> <th>Mxx</th> <th>Pxx</th> </tr> </thead> <tbody> <tr> <td><b>N</b> 10 bar</td> <td>-</td> <td>•</td> <td>•</td> </tr> <tr> <td><b>H</b> 10 bar</td> <td>•</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Axx	Mxx	Pxx	<b>N</b> 10 bar	-	•	•	<b>H</b> 10 bar	•	-	-
	Axx	Mxx	Pxx										
<b>N</b> 10 bar	-	•	•										
<b>H</b> 10 bar	•	-	-										
<b>Seals</b>	<table border="1"> <tr> <td><b>B</b> NBR</td> <td><b>V</b> FPM</td> </tr> </table>	<b>B</b> NBR	<b>V</b> FPM										
<b>B</b> NBR	<b>V</b> FPM												
<b>Bypass valve</b>	<table border="1"> <tr> <td><b>E</b> 3 bar</td> <td>- 1.75 bar</td> </tr> </table>	<b>E</b> 3 bar	- 1.75 bar										
<b>E</b> 3 bar	- 1.75 bar												
<b>Executions</b>	<table border="1"> <tr> <td><b>Base</b></td> <td><b>zérospark*</b></td> <td></td> </tr> <tr> <td><b>P01</b></td> <td><b>Z01</b></td> <td>MP Filtri standard</td> </tr> <tr> <td><b>Pxx</b></td> <td><b>Zxx</b></td> <td>Customized</td> </tr> </table>	<b>Base</b>	<b>zérospark*</b>		<b>P01</b>	<b>Z01</b>	MP Filtri standard	<b>Pxx</b>	<b>Zxx</b>	Customized			
<b>Base</b>	<b>zérospark*</b>												
<b>P01</b>	<b>Z01</b>	MP Filtri standard											
<b>Pxx</b>	<b>Zxx</b>	Customized											

### CLOGGING INDICATORS

See page 710-711

<b>BVA</b> Axial pressure gauge	<b>BEA</b> Electrical pressure indicator
<b>BVR</b> Radial pressure gauge	<b>BEM</b> Electrical pressure indicator
<b>BVP</b> Visual pressure indicator with automatic reset	<b>BLA</b> Electrical / visual pressure indicator
<b>BVQ</b> Visual pressure indicator with manual reset	

### ADDITIONAL FEATURES


See page 266

<b>TE</b> Extension tube	<b>DPT</b> Dipstick
<b>DFS</b> Diffuser with fast lock connection	

MPTX116		
Filter length	H1 [mm]	H2 [mm]
1	99	120
2	146	170
3	224	250
4	326	350

Connections	T
G1-G2-G3	G 1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

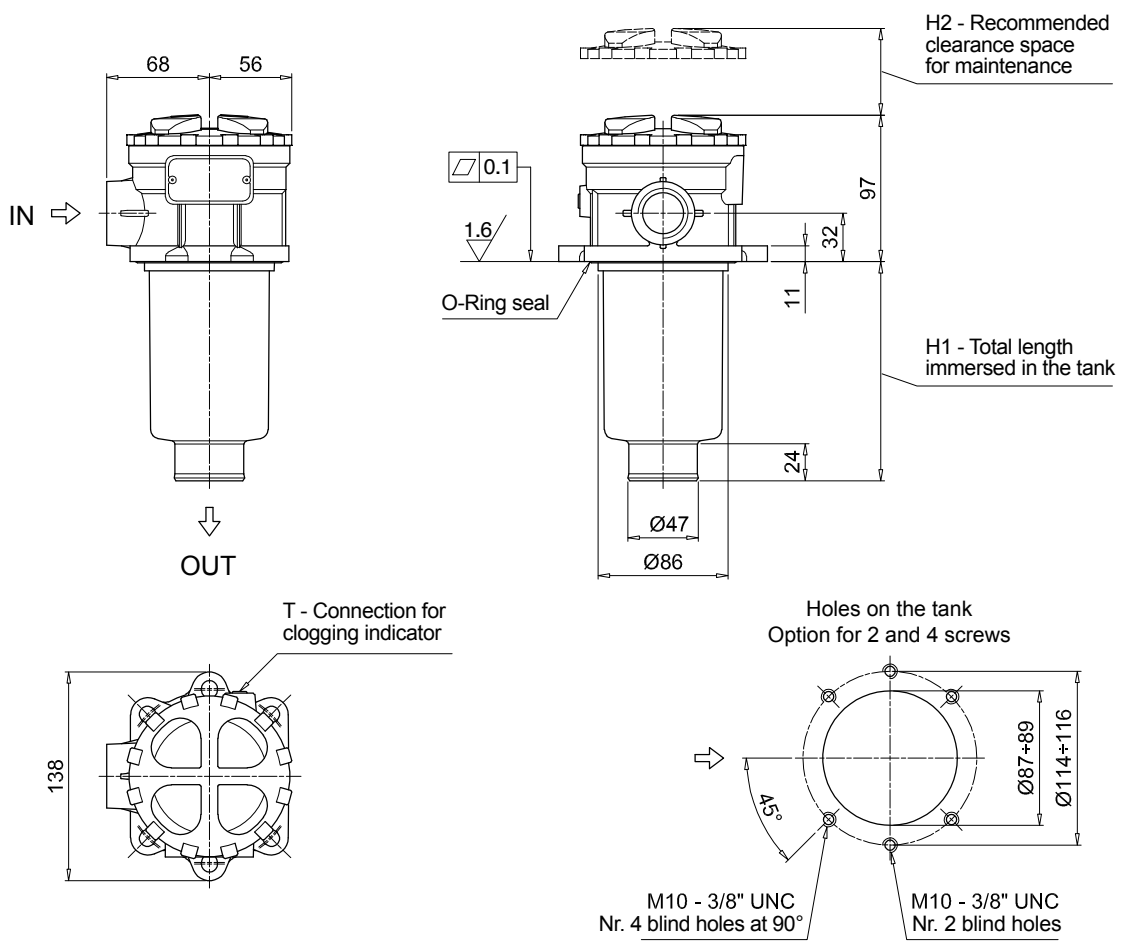

## Designation & Ordering code

### COMPLETE FILTER

**Series and size**  
**MPTX120** Filter featuring **MY CLEAN** Filter Element

Configuration example 1: **MPTX120** | **1** | **A** | **G1** | **0** | **A06** | **E** | **P01**  
 Configuration example 2: **MPTX120** | **3** | **V** | **G4** | **1** | **M25** | **B** | **P01**

**Length**  
**1** | **2** | **3** | **4**

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized	•	•	-
<b>Z</b> FPM head anodized	•	•	-

Main Connections	Rear connections	Aux size 1	Aux size 2
<b>G1</b> G 3/4"	G 3/4"	G 3/8"	G 1/2"
<b>G2</b> G 1"	G 1"		
<b>G3</b> G 1 1/4"	G 3/4"	3/8" NPT	1/2" NPT
<b>G4</b> 3/4" NPT	3/4" NPT		
<b>G5</b> 1" NPT	1" NPT	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G6</b> 1 1/4" NPT	3/4" NPT		
<b>G7</b> SAE 12 - 1 1/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN		
<b>G8</b> SAE 16 - 1 5/16" - 12 UN	SAE 16 - 1 5/16" - 12 UN		
<b>G9</b> SAE 20 - 1 5/8" - 12 UN	SAE 12 - 1 1/16" - 12 UN		

**Aux connection** - see previous table  
**0** Not machined | **1** Aux size 1 | **2** Aux size 2

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Bypass valve		
<b>E</b>	3 bar	
<b>B</b>	1.75 bar	

Executions		
<b>Base</b>	<b>zero<span style="color:blue">spark</span>*</b>	
<b>P01</b>	<b>Z01</b>	MP Filtri standard
<b>Pxx</b>	<b>Zxx</b>	Customized

### FILTER ELEMENT

**Element series and size**  
**MFx100** Filter Element with **MY CLEAN** feature

Configuration example 1: **MFx100** | **1** | **A06** | **H** | **B** | **E** | **P01**  
 Configuration example 2: **MFx100** | **3** | **M25** | **N** | **V** | **P01**

**Element length**  
**1** | **2** | **3** | **4**

Element Δp	Filter media		
	Axx	Mxx	Pxx
<b>N</b> 10 bar	-	•	•
<b>H</b> 10 bar	•	-	-

Seals	
<b>B</b>	NBR
<b>V</b>	FPM

Bypass valve	
<b>E</b>	3 bar
-	1.75 bar

Executions		
<b>Base</b>	<b>zero<span style="color:blue">spark</span>*</b>	
<b>P01</b>	<b>Z01</b>	MP Filtri standard
<b>Pxx</b>	<b>Zxx</b>	Customized

### CLOGGING INDICATORS

See page 710-711

<b>BVA</b> Axial pressure gauge	<b>BEA</b> Electrical pressure indicator
<b>BVR</b> Radial pressure gauge	<b>BEM</b> Electrical pressure indicator
<b>BVP</b> Visual pressure indicator with automatic reset	<b>BLA</b> Electrical / visual pressure indicator
<b>BVQ</b> Visual pressure indicator with manual reset	

### ADDITIONAL FEATURES


See page 266

<b>TE</b> Extension tube	<b>DPT</b> Dipstick
<b>DFS</b> Diffuser with fast lock connection	

MPTX120		
Filter length	H1 [mm]	H2 [mm]
<b>1</b>	99	120
<b>2</b>	144	170
<b>3</b>	222	250
<b>4</b>	324	350

Connections	T
<b>G1-G2-G3</b>	G 1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT




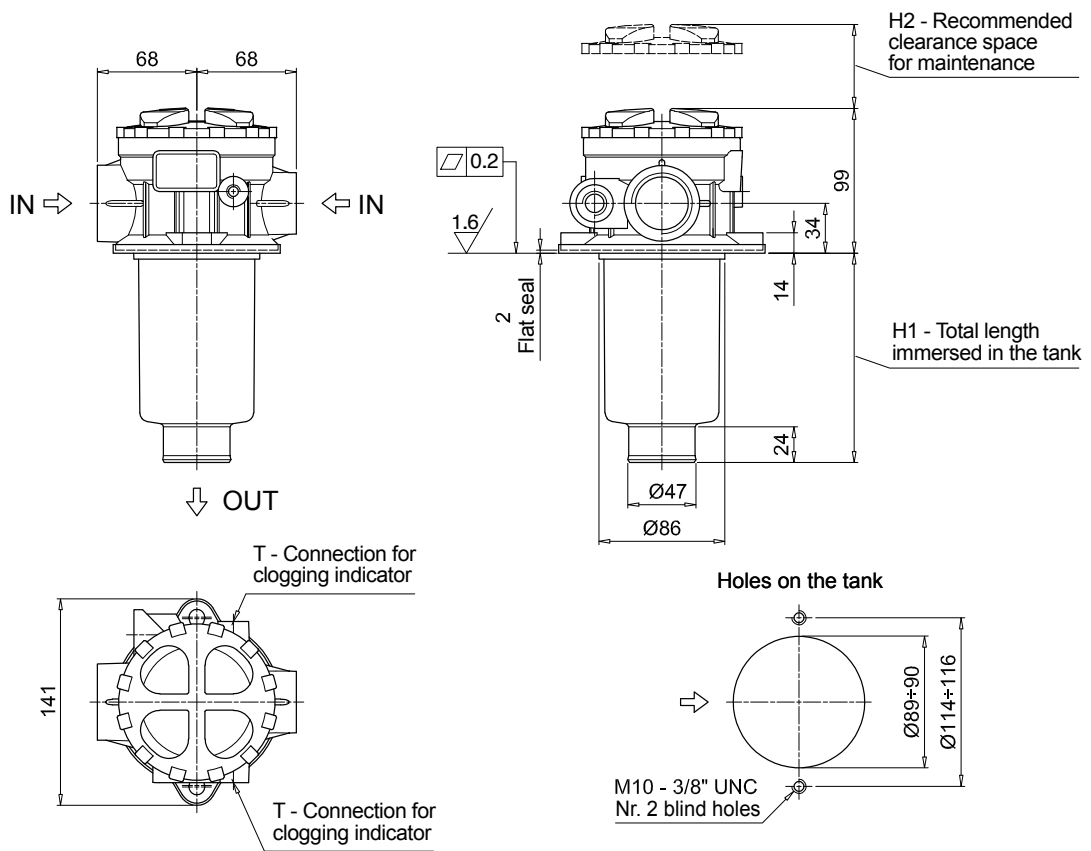


# MPTX SPARE PARTS

Order number for spare parts

MPTX 025 - 027 - 110

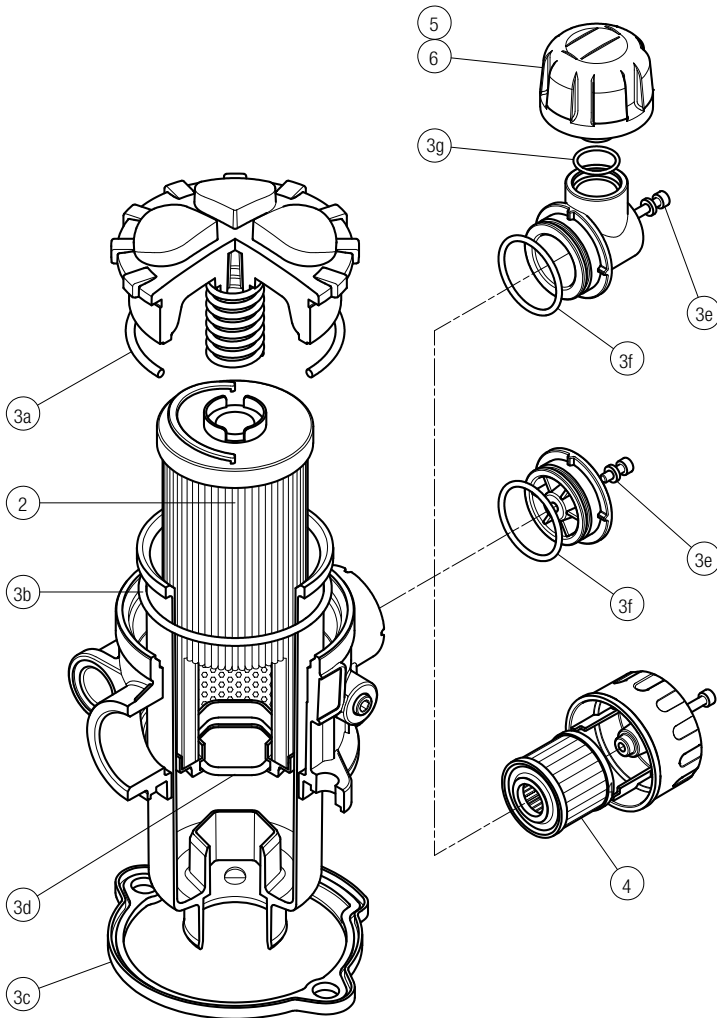


MPTX 116

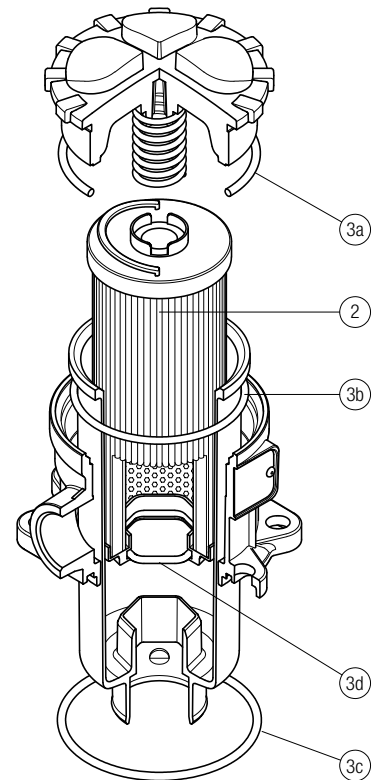


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number NBR	FPM	Air breather filter element - version:		
				C	D	P
MPTX 025	See order table	02050701	02050702	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPTX 027		02050703	02050704	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPTX 110		02050709	02050710	10 µm A5L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number NBR	FPM
MPTX 116	See order table	02050737	02050738

**MPTX 114**

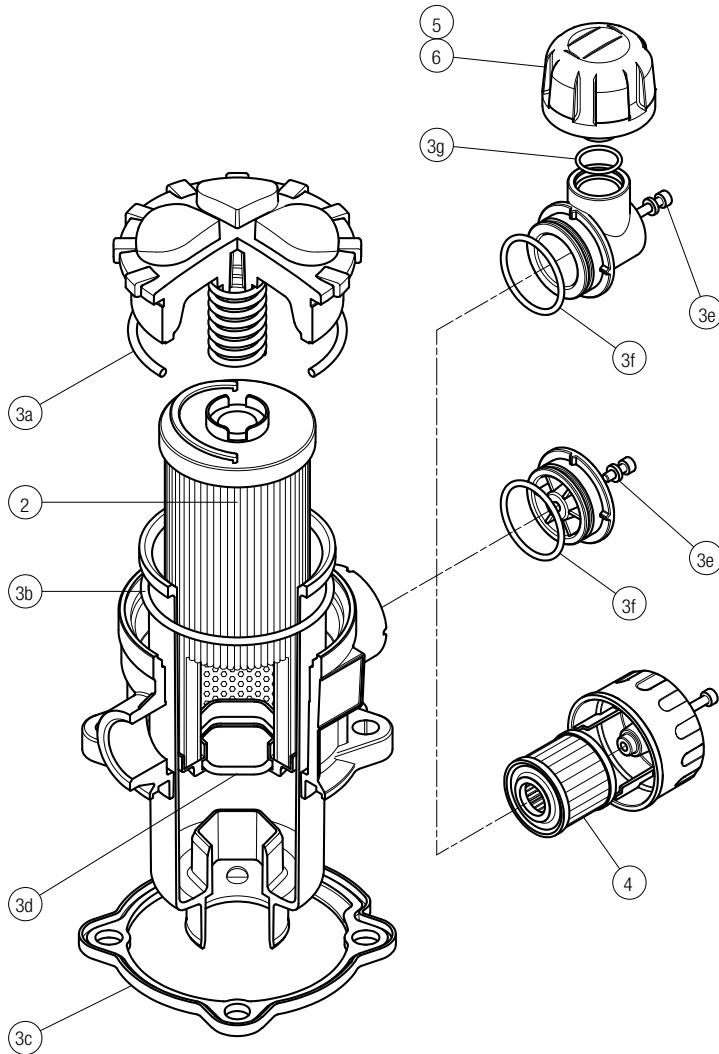

**MPTX 120**

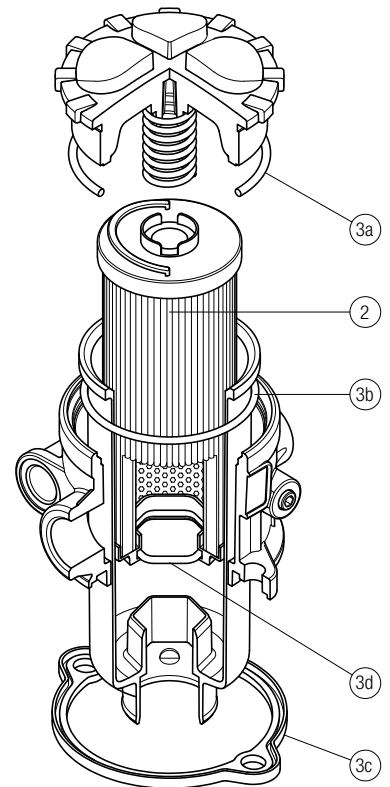

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number		Air breather filter element - version:		
		NBR	FPM	C	D	P
<b>MPTX 114</b>	See order table	02050707	02050708	10 µm A5L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
<b>MPTX 120</b>	See order table	02050711	02050712

# Accessories

## POLYAMIDE EXTENSION TUBE

H1 - Total length immersed in the tank

Configuration example: **TE** **40** **A** **250**

Series	Size	Material	Length	H [mm]
<b>TE</b>			<b>200</b>	200
			<b>250</b>	250
			<b>300</b>	300
			<b>350</b>	350
			<b>400</b>	400
			<b>450</b>	450
			<b>500</b>	500

Filter series		Filter size		Filter length	Tube length										
					TE25	TE32	TE40	200	250	300	350	400	450	500	
MPF - MPFX	30			1	•	-	-	266	316	366	416	466	516	566	
MPF	100	104	110	1	-	•	-	275	325	375	425	475	525	575	
				2	-	-	-	322	372	422	472	522	572	622	
				3	-	-	•	400	450	500	550	600	650	700	
				4	-	-	-	502	552	602	652	702	752	802	
MPFX	100	104	110	1	-	-	•	277	327	377	427	477	527	577	
				2	-	-	•	322	372	422	472	522	572	622	
				3	-	-	•	400	450	500	550	600	650	700	
				4	-	-	-	502	552	602	652	702	752	802	
MPF MPFX	181	182	184	1	-	-	•	410	460	510	560	610	660	710	
				2	-	-	•	623	673	723	773	823	873	923	
MPT MPTX	025		027		1	•	-	-	278	328	378	428	478	528	578
					2	-	-	-	342	392	442	492	542	592	642
					3	-	-	-	380	430	480	530	580	630	680
MPT	110	114	116	120	1	-	•	-	273	323	373	423	473	523	573
					2	-	-	•	320	370	420	470	520	570	620
					3	-	-	-	396	446	496	546	596	646	696
					4	-	-	•	498	548	598	648	698	748	798
MPTX	110	114	116	120	1	-	-	•	273	323	373	423	473	523	573
					2	-	-	•	318	368	418	468	518	568	618
					3	-	-	-	396	446	496	546	596	646	696
					4	-	-	-	498	548	598	648	698	748	798

## STEEL EXTENSION TUBE


H1 - Total length immersed in the tank

Configuration example: **MPF191** **2** **A** **F1** **A10** **H** **B** **S60**

Series	Size	Material	Length	H1 [mm]
<b>S30</b>			<b>300</b>	300
<b>S35</b>			<b>350</b>	350
<b>S40</b>			<b>400</b>	400
<b>S45</b>			<b>450</b>	450
<b>S50</b>			<b>500</b>	500
<b>S60</b>			<b>600</b>	600
<b>S70</b>			<b>700</b>	700
<b>S80</b>			<b>800</b>	800
<b>S90</b>			<b>900</b>	900

Filter series		Filter size		Filter length	Ø D [mm]		
					52	65	
MPF	400	191	192	194	2	•	-
					1	•	-
		410	450	451	2	-	•
					3	-	•
					1	-	•

## DIFFUSER WITH FAST LOCK CONNECTION

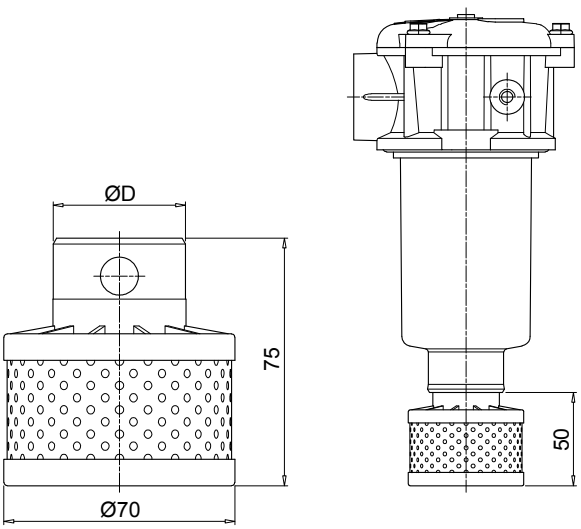


Configuration example: **DFS 32 A 075**

Series		<b>DFS</b>
Size	ø D [mm]	
<b>32</b>	32	
<b>40</b>	40	
Version		<b>A</b> Standard
Length		<b>075</b> Standard

COMPATIBILITY TABLE							
Filter series	Filter size			Filter Length	DFS32	DFS40	
MPF	100	104	110	1	•	-	
				2	-	-	
				3	-	•	
				4	-	-	
MPFX	100	104	110	1	-	•	
				2	-	•	
				3	-	-	
				4	-	-	
MPT	110	114	116	120	1	•	-
					2	-	-
					3	-	•
					4	-	-
MPTX	110	114	116	120	1	-	•
					2	-	•
					3	-	-
					4	-	-

## DIPSTICK

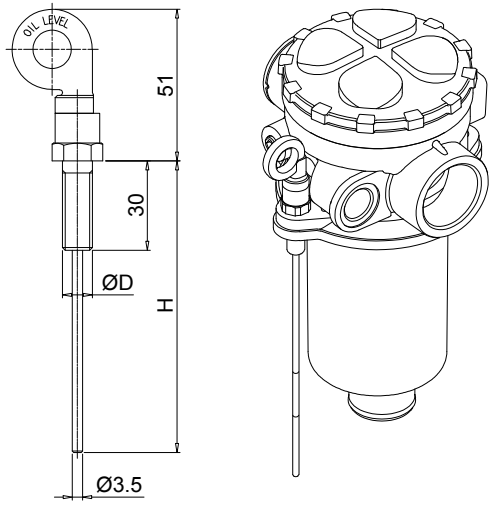


Configuration example: **DPT 20 M10 A P01**

Series		<b>DPT</b>
Length	H [mm]	
<b>15</b>	134	
<b>20</b>	184	
<b>25</b>	234	
<b>30</b>	284	
<b>35</b>	334	
Fastening		
<b>M8</b>	Fastening with screws ø D = M8	
<b>M10</b>	Fastening with screws ø D = M10	
Seals		
<b>A</b>	NBR	
<b>V</b>	FPM	
Execution		
<b>P01</b>	MP Filtri standard	
<b>Pxx</b>	Customized	

**Materials**  
 - Screw: phosphatized steel  
 - Stick: phosphatized steel  
 - Handle: Polyamide

**Technical data**  
 Working temperature: from -25 °C to +110 °C

## FILLER PLUG

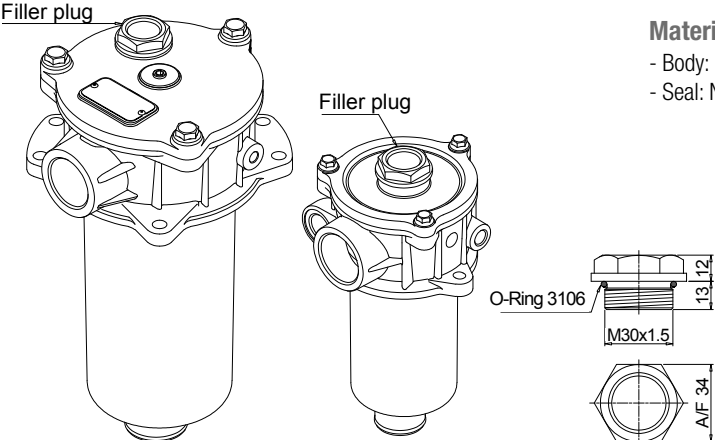

**Materials**  
 - Body: Polyamide  
 - Seal: NBR

**Technical data**  
 Tightening torque: 15 N·m

O-Ring 3106

For any further information, please, contact our commercial dept.